




INDUSTRIAL TEMPERATURE TRANSMITTER ASSEMBLY

200 Series

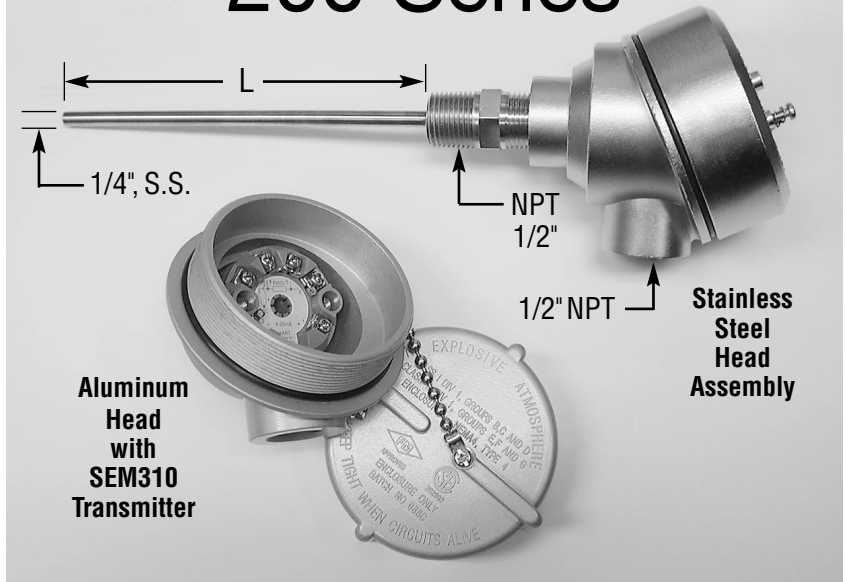

THERMOCOUPLE or RTD

INDUSTRIAL DESIGN

AGENCY LISTED HEADS in ALUMINUM and STAINLESS STEEL

COMPLETE with TRANSMITTER

200							
"L" Length in inches							
F Fixed SL Spring Loaded							
Process Fitting							
1/2" NPT Standard 1/4" NPT Fixed Only 1/8" NPT Fixed Only							
Connection Head							
AN Aluminum NEMA 4 AX Aluminum X Proof SSX S. S. X Proof							
Temperature Sensor							Transmitter Model #
Thermocouple Type		RTD, Class A, PT100Ω					
Grounded	Ungrounded	Max Temp.	Model				
J	JU	450°F	EPT100				
K	KU	1100°F	GPT100				
T	TU						
E	EU						
R	RU						
S	SU						
B	BU						
							Temperature Range

For use with a thermowell, the temperature sensor "L" length is specified as the thermowell "A" length (bore depth) - 3/4". A typical model number for use in a thermowell with an "A" of 6" and a "U" of 4-1/2" would be: **200 - 5 1/4 - SL - 1/2 - AX - EPT100 - SEM310 - 0/400F**

For modifications and special orders consult factory

STATUS INSTRUMENTS INC. www.statinst.com

PO Box 548, 456 Park Ave., Scotch Plains, NJ 07076 Ph: (908) 490-0232
 Ph: (800) 700-3272 Fax: (800) 700-5468 Email: rc@statinst.com