


# SEM1615 DIN RAIL UNIVERSAL TEMPERATURE TRANSMITTER

- UNIVERSAL DUAL CHANNEL INPUT
- DIN RAIL MOUNT (4 to 20) mA LOOP OUTPUT
- MATHS FUNCTIONS
- SENSOR CHARACTERISTICS DOWNLOAD VIA USB PORT ALLOWS FOR CUSTOM TYPES
- FLASH TESTED TO 4 KV DC

## ➤ INTRODUCTION

The SEM1615 is a DIN rail mounted universal transmitter that accepts RTD, Thermocouple, Potentiometer or millivolt input signals and converts them to the industry standard (4 to 20) mA transmission signal.

The SEM1615 is programmed using a standard USB lead and our free configuration software “USBSpeedlink” downloaded from our web site.

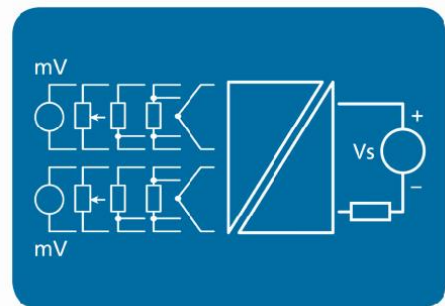

## ➤ FEATURE HIGHLIGHTS

### SENSOR REFERENCING

The SEM1615 sensor referencing via the Windows based “USBSpeedlink” software allows for close matching to a known reference sensor eliminating possible sensor errors.

### CUSTOM LINEARISATION

The SEM1615 can be programmed with a custom linearization to suit nonstandard sensors or sensors with unusual or unique characteristics. Consult the sales office for details.

### SENSOR BURN OUT DETECTION

If a sensor wire is broken or becomes disconnected the SEM1615 output will automatically go to its user defined level (upscale or downscale) or a pre-set value.

### OUTPUT CURRENT PRESET

For ease of system calibration and commissioning the output can be set to a pre-defined level anywhere within the (4 to 20) mA range.

# SEM1615 DIN RAIL UNIVERSAL TEMPERATURE TRANSMITTER

## SPECIFICATIONS

ELECTRICAL INPUT		SPECIFICATIONS @20 °C
Range + Options	Accuracy	Stability
<b>Resistance</b>		
(10 to 10000) Ω Excitation 200 uA Lead resistance (0 to 20) Ω (2,3 or 4 Wire connection)	(10 to 500) Ω ± 0.055 Ω, (500 to 2500) Ω ± 0.5 Ω, (2500 to 10500) Ω ±0.2 % of reading (+ Lead error on 2 wire)	(0 to 500) Ω 0.013 Ω/°C, (500 to 2500) Ω 0.063 Ω/°C, (2500 to 10500) Ω 0.27 Ω/°C
<b>Slide wire</b>		
(0 to 100) % Travel Wire resistance (1 to 100) KΩ	± 0.1 %	±0.001%/°C
<b>mV</b>		
(-205 to 205) mV DC (-1000 to 1000) mV DC	±0.02 mV ±10.0 mV	±0.005 mV/°C ±0.02 mV/°C

RTD INPUT		SPECIFICATIONS @20 °C
RTD (2,3 or 4 wire Single/ 2 wire Dual Channel; isolated tip only for Dual operation)		
Type	Range	Accuracy/ Stability
Pt100 (IEC)	(-200 to 850) °C	0.2 °C ± (°0.05% of reading) (Plus sensor error)
Pt500 (IEC)	(-200 to 850) °C	
Pt1000 (IEC)	(-200 to 600) °C	
Ni100	(-60 to 180) °C	
Ni120	(-70 to 180) °C	
Ni1000	(-40 to 150) °C	
Cu53	(-40 to 180) °C	
Cu100	(-80 to 260) °C	
Cu1000	(-80 to 260) °C	
Library contains more standards/types Including silicon sensors		
Temperature stability: - Refer to resistance stability values for thermal effect		

THERMOCOUPLE INPUT		SPECIFICATIONS @20 °C
Thermocouple (Single/Dual Channel; isolated tip only for Dual operation)		
Type	Range	Accuracy/ Stability
K	(-150 to 1370) °C	±0.1 % of full scale ± 0.5 °C (Plus sensor error)
J	(-200 to 1200) °C	
N	(-270 to 1300) °C	
E	(-260 to 1000) °C	
T	(-270 to 400) °C	±0.2 % of full scale ± 0.5 °C (Plus sensor error)
R	(0 to 1760) °C	±0.1 % of full scale ± 0.5 °C over range (800 to 1760) °C (Plus sensor error)
S	(0 to 1760) °C	
L	(-200 to 900) °C	±0.1 % of full scale ± 0.5 °C (Plus sensor error)
U	(-200 to 600) °C	
B	(0 to 1820) °C	
C	(0 to 2300) °C	
D	(0 to 2300) °C	
G	(0 to 2300) °C	
Library contains more standards/ types		
Temperature stability: - Refer to mV stability values for thermal effect		

# SEM1615 DIN RAIL UNIVERSAL TEMPERATURE TRANSMITTER

DUAL CHANNEL OPERATION	
Thermocouples A & B	Functions; Average, Redundancy, A + B, A - B, Highest, Lowest
mV A & B	Functions; Average, A + B, A - B, Highest, Lowest
RTD A & B	Two wire connection. Functions; Average, A + B, A - B, Highest, Lowest

COLD JUNCTION (Ambient sensor)		SPECIFICATIONS @20 °C
Type/ Options	Range	Accuracy/ Stability/ Notes
Thermistor 10K Beta 3380	(-30 to 70) °C	±0.2 °C
Thermal drift	Zero at 20 °C	±0.05 °C/ °C

OUTPUT		SPECIFICATIONS @20 °C
Type/ Options	Range	Accuracy/ Stability/ Notes
Two wire current	(4 to 20) mA	(mA Out/ 2000) or 5 uA whichever is the greater
Thermal drift	Zero at 20 °C	±1 uA/ °C
User set minimum current	(3.5 to 4.0) mA	3.8 mA default
User set maximum current	(20 to 23.0) mA	20.5 mA default
User set error current	(3.5 to 23.0) mA	Any mA value within range
User pre-set current	(3.5 to 23.0) mA	For diagnostics
Loop effect	± 0.2 uA/V	
Loop supply	(10 to 30) V DC, > 35 mA	SELV
Max load	[(V supply - 10)/20] KΩ	700 Ω @ 24 V DC
Protection	Reverse and over voltage	

USB USER INTERFACE		
Type/ Options/ Function	Description	Notes
USB 2.0	Mini B USB	USB powers device for config only. Power loop for live data.
Baud Rate	38,400	
Sensor configuration	Sensor type Sensor offset Sensor fail high or low Pre-set sensor value Set No. wires, resistance Input T/C Cold junction compensation	TC/mV/RTD/Ohms/Slide wire Dual TC/mV/RTD Dual sensors use separate offsets Dual sensors share sensor fail For diagnostics 2, 3 or 4 wire Automatic or fixed
Profiler configuration	Set profiler input range Set profiler segments Enter profile X-Y values Set profiler output units Set the output process range TC & RTD input only set units	In sensor units (4 to 22) segments  Profiler set up
Output signal	Select the process range for re-transmission Set minimum current Set maximum current Set the error current Pre-set Loop current	Set in profiler out units (3.5 to 4.0) mA (20 to 23.0) mA (3.5 to 23.0) mA (3.5 to 23.0) mA
Damping	User set process variable (PV) damping	(1 to 32) seconds to reach 70% final value

# SEM1615 DIN RAIL UNIVERSAL TEMPERATURE TRANSMITTER

<p>Diagnostics</p>	<p>Read (PV, mA, CJ °C, error &amp; power off) log points back from device Set the log period Clear log and start new log Export log data Detect open circuit sensor wire Calibration date, certificate number, calibrated by</p>	<p>Up to 150 points Log rate (1 to 60) readings per hour</p>
<p>Live data</p>	<p>Read process variable (PV) Read profiler input signal Read profiler output signal Read cold junction temperature Read % output Read mA output</p>	

GENERAL	
Function	Description
Isolation	Flash tested 5 seconds at 4 KV DC, working voltage 50 V AC
Reading update	200 ms
Response time	500 ms to reach 70% final value
Warm up	2 minutes
Start-up time	5 seconds

AMBIENT	
Temperature	Operating/storage (-30 to 70) °C
Humidity	Operating/storage (10 to 95) % Non-condensing
Installation enclosure	EN50022 DIN rail enclosure offering protection >= IP65
Configuration ambient	(10 to 30) °C
Temperature	Operating/storage (-30 to 70) °C


MECHANICAL	
Enclosure	DIN 43880
Material	Polyimide 6.6
Dimensions	(17.5 x 90 x 56.4) mm
Weight	Approximately 70 g
Colour	Grey

CONNECTIONS	
Output	Screw terminals 2.5 mm maximum Pins (4,5)
Input	Screw terminals 2.5 mm maximum Pins (7,8,9,12)
USB	Mini B USB
Output	Screw terminals 2.5 mm maximum Pins (4,5)

# SEM1615 DIN RAIL UNIVERSAL TEMPERATURE TRANSMITTER

APPROVALS	
EMC	BS EN 61326 Industrial
Ingress protection	BS EN 60529
ROHS	Directive 2011/65/E0

ORDER CODE	SEM1615
------------	---------

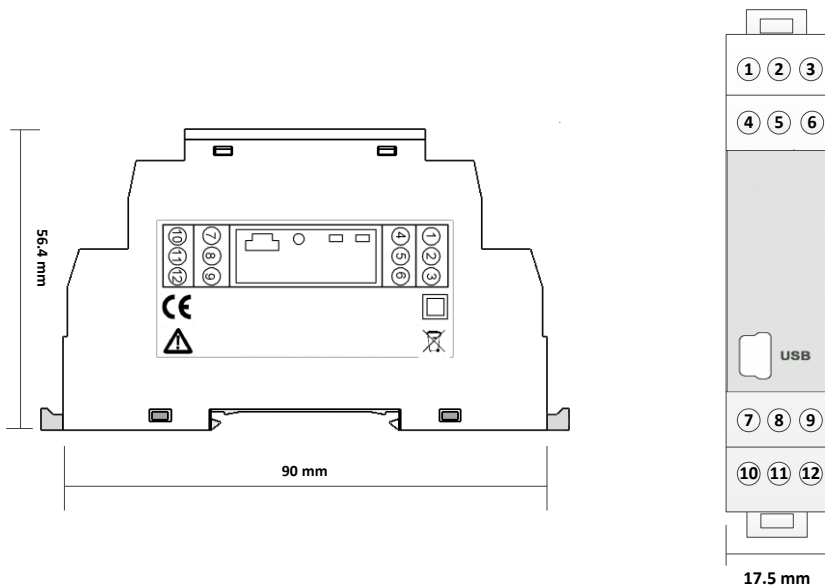

ACCESSORIES	
Configuration software	USBSpeedLink free of charge from <a href="http://www.status.co.uk">www.status.co.uk</a>
USB programming lead	USB A to mini B programming lead part number 42-200-0001-01
Calibration certificates	Refer to <a href="mailto:sales@status.co.uk">sales@status.co.uk</a>

To maintain full accuracy annual calibration is required contact [support@status.co.uk](mailto:support@status.co.uk) for details  
 The data in this document is subject to change. Status Instruments assumes no responsibility for errors

Status Instruments Inc  
 12H Worlds Fair Drive  
 Somerset, NJ 08873  
 Tel: (800) 700-3272  
 Fax: (800) 700-5468  
 Email: [sales@statinst.com](mailto:sales@statinst.com)  
 Website: [www.statinst.com](http://www.statinst.com)

D2601-01-05 CN5494 SEM1615 Data Sheet, Page 5 of 5

